

# Phaser® 3160N Monochrome Laser Printer

## Print efficiency on a budget

Get the printing power to meet the everyday demands of a busy single user or an entire workgroup. Compact and capable, the Phaser 3160N delivers all-purpose printing at a very affordable price.



### Empower your office

- Fast print speed of up to 24 ppm (letter/A4) – plus a fast first-page-out time – to ease your workload.
- Crisp 600 x 600 dpi and up to 1200 x 1200 enhanced image quality.
- The Phaser 3160N comes with USB standard and is network ready. It easily connects one user or your entire workgroup.
- CentreWare® Internet Services lets you check job status and manage your networked Phaser 3160N printer from anywhere using a web browser.
- Print features such as watermark\*, overlays\*, poster and booklet (manual) modes\* helps you to tackle more projects.
- Robust design and a 15,000 pages maximum monthly duty cycle for trouble-free dependability.


### Surprisingly low cost

- Get more for less with superior laser performance at an entry level price.
- Power save mode and ENERGY STAR® qualification benefit both the environment and your bottom line.
- Save paper by using manual two-sided printing feature\* or print multiple pages on a single sheet of paper (N-up).
- Long-lasting 2,500-page high-capacity toner cartridge; Toner Save mode extends consumable capacity. Job Cancel feature that helps reduce printing of unwanted paper.

### Just the right fit

- Compact design that sits comfortably on your desktop or small workspace.
- Very quiet operation that is suitable for small offices.
- Prints in various environments including Windows, Linux and Macintosh.
- Phaser 3160N supports IPv6 and SNMPv3 to ensure that your networked printer stays secure.
- Generous paper capacity of 250 sheets means fewer interruptions to reload paper. The enclosed paper tray keeps the printer's footprint small, and paper clean.
- A single-sheet multipurpose tray allows feeding of special sizes and types of media, like envelopes, transparencies and postcards.

\*Windows only

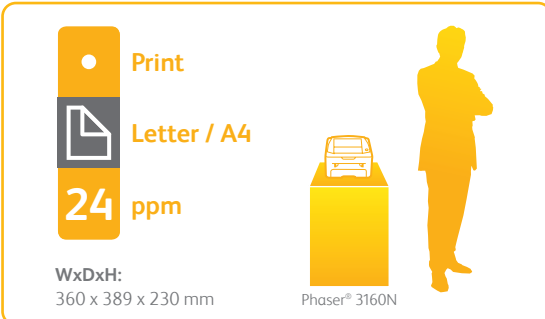

**Print**

**Letter / A4**

**24 ppm**

**WxDxH:**  
360 x 389 x 230 mm

Phaser® 3160N

# Specifications of Phaser® 3160N

## Print Function

Print Speed	Up to 24 ppm Letter / A4
Print Resolution	600 x 600 dpi, up to 1200 x 1200 enhanced image quality
First-page-out Time	Less than 9 seconds
Warm-up Time	As fast as 18 seconds
Memory (std/max)	64 MB
Processor	360 MHz
PDL	PCL® 6/PCL5e, Epson/IBM, Emulation
Connectivity	USB 2.0, 10/100 Base-TX Ethernet, Supports IPV6, IPV4
Device Management	Status Monitor*, Printer Settings Utility, CentreWare® IS Embedded Web Server, Xerox CentreWare Web, Xerox Global Print Driver
Supported Operating System	Windows 2000/ XP/ Server 2003/ Server 2008/ Vista/ 7; Mac OS X version 10.3 to 10.6; Linux OS including Red Hat Enterprise Linux WS 4, 5 (32/64 bit) Fedora Core 2-10 (32/64 bit) SuSE Linux 9.1 (32 bit) OpenSuSE 9.2, 9.3, 10.0, 10.1, 10.2, 10.3, 11.0, 11.1 (32/64 bit), Mandrake 10.0, 10.1 (32/64 bit), Mandriva 2005, 2006, 2007, 2008, 2009 (32/64 bit), Ubuntu 6.06, 6.10, 7.04, 7.10, 8.04, 8.10 (32/64 bit), SuSE Linux Enterprise Desktop 9, 10 (32/64 bit), Debian 3.1, 4.0, 5.0 (32/64 bit)
Input Paper Size	Main Tray: A4, Letter, Legal, US Folio, Officio, JIS B5, ISO B5, Executive, A5, A6; Multipurpose Tray: A4, Letter, Legal, US Folio, Officio, JIS B5, ISO B5, Executive, A5, A6; Envelopes (Monarch, No. 10, DL, C5, C6); Custom size (76 x 127mm to 216 x 356mm)
Input Paper Weight	Main Tray: 60 – 105 gsm; Multipurpose Tray: 60 – 163 gsm
Media Input Capacity	Main Tray: 250 sheets Multipurpose Tray: 1 sheet
Media Output Capacity	80 sheets face-down
Media Types	Main Tray: Plain paper; Multipurpose Tray: Plain paper, envelopes, transparencies, labels, cardstock, Pre-printed paper, coloured paper
Monthly Duty Cycle	Up to 15,000 pages / month
Print Features	Watermarks*, Poster Printing*, N-up, Fit to page, Scaling, Overlays*, Booklets* (manual), Reduce/enlarge, Toner save, Custom-size pages
Dimensions (WxDxH)	360 x 389 x 230 mm
Weight	7.46 kg
Operating Environment	Temperature: Storage: 0° to 35° C, Operating: 10° to 32° C; Humidity: 20 % to 80 %, Sound pressure levels: Printing: Less than 50 dB(A), Standby: Less than 26 dB(A)
Electrical	Power: 220–240 VAC, 50/60 Hz, 50/60 Hz; Power consumption: Standby: 60 W, Printing: 360 W, Power save: 6.5 W; ENERGY STAR® qualified
Warranty	Please check with your Fuji Xerox Printer Channel reseller for more information

\*Windows only

## Consumables

Toner Cartridge: 2,500 pages <sup>1</sup>	CWAA0805
---	----------

<sup>1</sup> Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and print mode. Printer is shipped with one starter print cartridge, average yield 1,000 standard pages.

Descriptions in this material, product specifications and/or appearances are subject to change without prior notice due to improvements. Please note that the product colour appears differently from the actual colour as a result of properties of papers or printing ink. Windows is registered trademark of Microsoft Corporation. Macintosh, Mac OS and Ether Talk are trademarks of Apple Computer, Inc. Other company names or product names are registered trademarks or trademarks of each company.



### For Your Safe Use

- Before using the product, read the Instruction Manual carefully for proper use.
- Use the product with an appropriate adequate power source and voltage displayed.
- Be sure to establish a ground.
- In the case of a failure or short circuit, an electric shock may result.

**Reproduction Prohibitions** Please note that reproduction of the following is prohibited by law. Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. Unused postage stamps and post cards. Certificate stamps stipulated by law. The reproduction of works for copyright purposes (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range according to the above. This product is equipped with an anti-counterfeit feature. This feature is not intended to prevent illegal reproduction. Be extremely careful about the management of equipment used.



For more information or detailed product specifications, please call, email or visit our website at:

Fuji Xerox Asia Pacific Pte Ltd  
80 Anson Road  
#36-00 Fuji Xerox Towers  
Singapore 079907  
Tel: +65 6351-0118  
Email: sgp.sales@fujixerox.com

<http://www.fujixeroxprinters.com>

08/10

XEROX, and the sphere of connectivity design are trademarks or registered trademarks of Xerox Corporation in the U.S. and or other countries. Other trademarks are the property of their respective owners.