

PROFESSIONAL FINGERPRINT ACCESS CONTROL SYSTEM


New



- Composite algorithm system with high speed operating.
- 1 touch a-second user recognition.
- Standalone or network environment.
- Professional access control system support real-time entrance logs transferring.
- 24 hours continuous operation available.
- Audio-Visual indications for acceptance and rejection of valid/invalid fingers.
- Wired door bell connection supported.

F09

SKETCH DIAGRAM

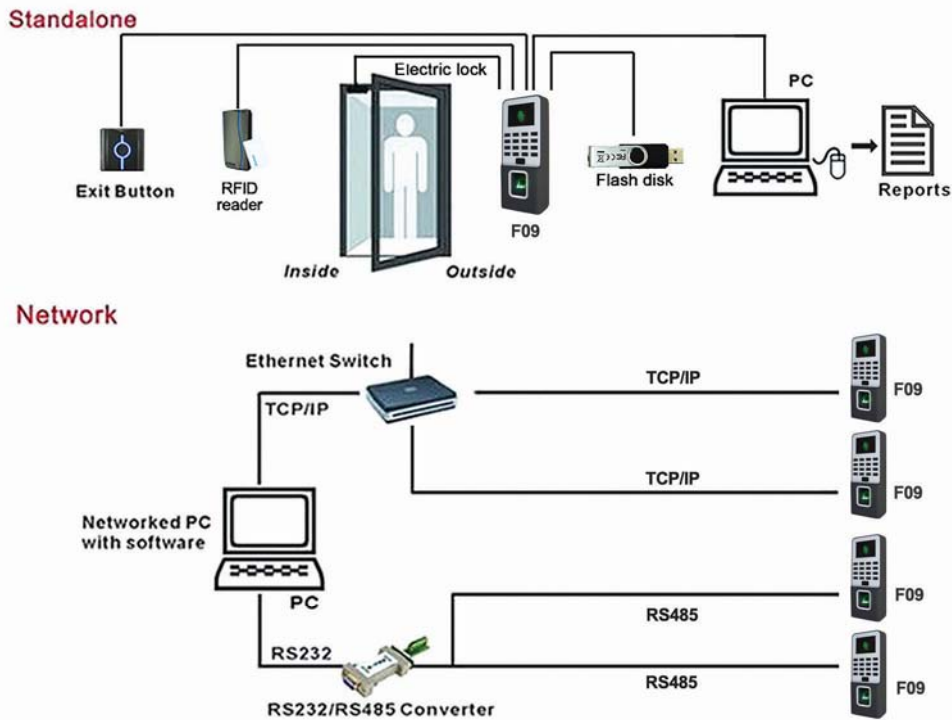

SPECIFICATION

F09

LCD Display

2.4" TFT LCD color screen

Speaker

Voice prompt (language can be selected)

Capacity

Fingerprint: 3,000 Logs: 100,000

Verification

Verification speed (1:1) ≤ 0.5s

Identification speed (1:1) ≤ 1s

Identification

FRR ≤ 0.01% FAR ≤ 0.0001%

Attendance status

Check in, Check out

Communications

TCP/IP, RS232/485, USB Host, wiegand in/out

Language

Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected

Environment

Operation temperature:0°C-45°C Operation humidity:20%-80%

Power Supply

110/220 VAC-12VDC(PS-3A is optional item)

Package info.

Machine size:18.5(L)*7.5(W)*4(H)cm Unit packing:25*15*9cm
Carton packing:53*33*45cm Real weight:0.95kg Volum weight:1.0kg

Function support

Professional access control; built-in relay; 50 time zones; 5 groups and 10 combinations; Dismantlement alarm; break-in alarm; dress alarm; DST; Scheduled bell; SMS; Auto-status; Webserver, Anti-pass back

Customize Function

ID card reader; Mifare card reader; HID card reader; Multi-verify; 9-PIN ID